
This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISIONS											
REV	DESCRIPTION	DATE	INITIAL	APPROVED							
Α	ADDED 2.50 REF, DIMENSION TO -1. ALSO ADDED ,455 REF, DIMENSION TO -3.	9/24/2009	WP	GE							
1	CH'D -3 HANDLE DIA., WAS Ø 1,20 IS Ø 1,28, -3 REF. DIM. ,455 IS NOW ,767.	9/28/2009	WP	GE							
2	REMOVED ENGRAVING FROM -1, CH'ID -3 OD, FROM Ø 1, 28 TO Ø 1,276, MILLED FLAT FROM .51 TO .587 REF., AND .767 REF. TO .50 REF. ALSO CH'D -3 .032x60° TO .03 @ 30°, AND .08x60° TO .08@60°. ALSO ADDED VISIBLE KNURLING.	10/3/2009	WP	RW							
2A	CH'D WAS CLEAR HARD ANODIZING IS CLEAR ANODIZING AND ADDED KNURL NOTE.	10/27/2010	WP	GE							
2B	SEPERATED TOOLS FROM KIT RBW6205G00331-3G. ADDED AW139 TO USED ON MODEL.	10/17/2013	CFS	RW							

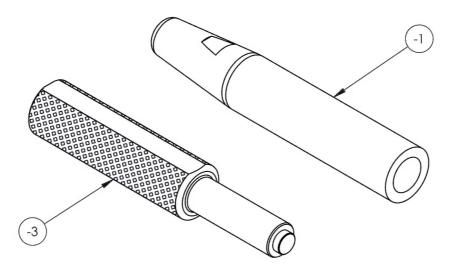

ORIGINAL No. REF.
RBW3205G00331-3G ≡ 3G3205G00331
DO NOT USE, FOR REFERENCE ONLY.

<u>FUNCTION:</u> USED TO REMOVE AND INSTALL THE MAIN ROTOR BLADE BOLTS.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.				
			-1	1	BOLT GUIDE	6061	RBW6205G03451-3G	1				
			-3	1	PULLER	6061	RBW6205G08451-3G	1				
		B/O	-5	1	PISTOL CASE	BLACK PLASTIC	R.S.R. SPORTS #10137	N/S				

® RED BARN MACHINE

M/R BLADE RETENTION BOLT REM/INSTL TOOL KIT

DWG NO. RBW6205G00331-3G

MAT'L

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

XXX ± .005 FRACTIONS ± 1/32

XX ± .01 ANGLES ±.5°

X ± .1 ANGLES ±.5°

I. BREAK ALL SHARP EDGES .015 × 45°
OR .015R
2. DIMENSIONAL LIMITS APPLY AFTER PLATING

SCALE 1:2 DATE 10/17/2013 SHEET 1 OF 1

REV